

# Spyder3 Color GigE Vision

Bilinear Color Linescan Camera



## Overview

# Low-cost, ease of use, flexibility and Gigabit Ethernet Interface.

Teledyne DALSA's Spyder3 Color GigE camera is a color line scan camera based on the successful Spyder3 dual line scan monochrome model. This camera provides a low cost solution with high color fidelity, flexibility, and ease of use.

The Spyder3 Color GigE camera has the red and blue color pixels alternating in one line and all the green pixels in the other line with no spacing between the two lines to minimize image artifact. The camera offers several color output format options, including RGB, RG/BG, or G only to meet different imaging requirements.

This camera also incorporates advanced features such as flat field correction, automatic white balance, and is pre-calibrated to light sources such as white LEDs, for ease of use.

### Key Features

- 2k and 4k resolutions
- RGB, RG/BG, or G output formats
- Pre-calibrated light sources
- Cost-effective
- Ease of use
- GigE configuration

### Programmability

- Automatic white balance
- Color correction
- Bidirectional
- Flat field correction

### Typical Applications

- Wood and tile inspection
- Cotton and textile
- Food, drug, and tobacco inspection
- Recycling sorting
- General machine vision

## Specifications






Resolution	2048 x 2 pixels / 4096 x 2 pixels
Data Rate	80 megapixels per second
Max. Line/Frame Rate	18 kHz / 9 kHz*
Pixel Size	14 $\mu\text{m}$ x 14 $\mu\text{m}$ / 10 $\mu\text{m}$ x 10 $\mu\text{m}$
Data Format	8 bit
Output	GigE
Lens Mount	M42 x 1, C, F
Responsivity	700 DN(nJ/cm <sup>2</sup> )@0dB, 12 bit 400 DN(nJ/cm <sup>2</sup> )@0dB, 12 bit
Dynamic Range	60 dB
Nominal Gain Range	$\pm 10$ dB
Size	72 mm x 60 mm x 50 mm (2k) 85 mm x 65 mm x 50mm (4k)
Mass	300 g
Operating Temp	0 °C to 50 °C
Power Supply	+12 V to +15 V
Power Dissipation	< 10.5 W
Regulatory Compliance	CE and RoHS
Control	RJ-45, 15-pin mini DSub
Data	RJ-45
Power	Hirose 6 HR10 pin male
Example Part Number	SG-32-04K80-00-R

\* Note: Maximum line rate may depend on data output format.





# Spyder3 Color GigE Vision

## Bilinear Color Linescan Camera

The Spyder3 Color GigE camera is a cost-effective and easy-to-use bilinear color linescan camera.

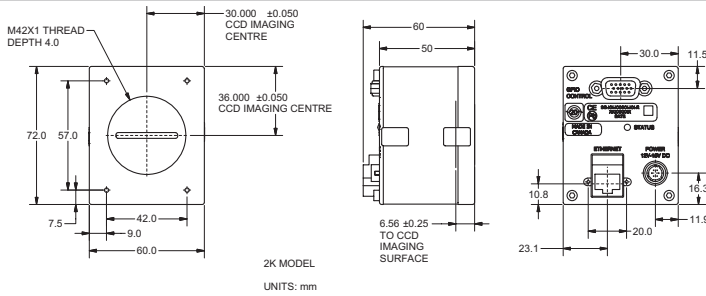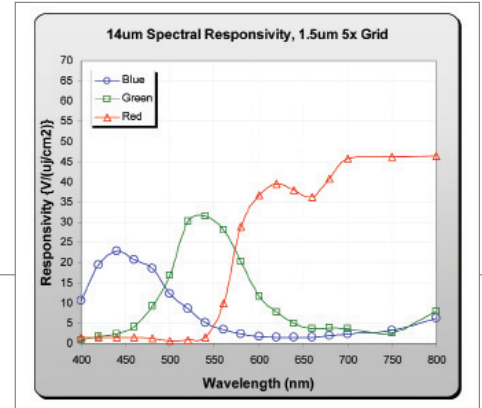

2k model

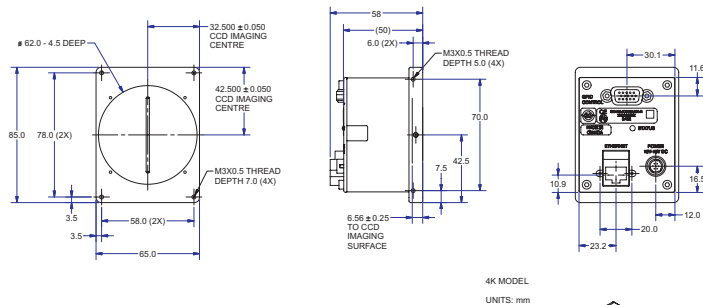

4k model



[www.teledynedalsa.com](http://www.teledynedalsa.com)

### Americas

Boston, USA  
Tel: +1 978-670-2000  
sales.americas@teledynedalsa.com

### Europe

Munich, Germany  
Tel: +49 8142-46770  
sales.europe@teledynedalsa.com

### Asia Pacific

Tokyo, Japan  
+81 3-5960-6353  
sales.asia@teledynedalsa.com

Teledyne DALSA is an international leader in digital imaging and semiconductors and has its corporate offices in Waterloo, Ontario, Canada.



All trademarks are registered by their respective companies. Teledyne DALSA reserves the right to make changes at any time without notice. © Teledyne DALSA 2011. 03-070-20024-02