



# ***CV-M536/M538/M539***

## ***Remote Head Monochrome CCD Camera***



- *High resolution monochrome 1/2" Hyper HAD IT CCD sensor*
- *CCIR: 752 (h) x 582 (v) pixels. EIA: 768 (h) x 494 (v) pixels*
- *Remote head  $\varnothing$ 17. 2 m, 5 m or 10 m cable lengths*
- *Cable to M538/M539 camera head is detachable*
- *Improved dynamic range and smear performance*
- *Extreme sensitivity. High S/N ratio  $>56$  dB*
- *Interlaced or non-interlaced scanning*
- *Field or frame integration mode*
- *Electronic shutter or asynchronous trigger shutter*
- *Continuous variable shutter in trigger mode 2*
- *Long time integration with external VD pulses*
- *HD/VD synchronization input or output – 75 Ohm or TTL level*
- *Exposure Enable (EEN) and Write Enable (WEN) output*
- *Frame grabber friendly interface*

***The leading manufacturer in high performance camera solutions***


# Specifications for CV-M536/M538/M539

## Specifications CV-M536/M538/M539C CV-M536/M538/M539E


Scanning system	625 lines 25 frames sec.	525 lines 30 frames sec.
CCD sensor	Monochrome 1/2" Hyper HAD IT CCD	
Sensing area for video	6.5 mm (h) x 4.8 mm (v)	
Picture elements effective	752 (h) x 582 (v)	768 (h) x 494 (v)
Elements in video out	737 (h) x 572 (v)	758 (h) x 484 (v)
Cell size	8.6 (h) x 8.3 (v) $\mu\text{m}$	8.4 (h) x 9.8 (v) $\mu\text{m}$
Resolution (horizontal)	560 TV lines	570 TV lines
Resolution (vertical)	570 TV lines	480 TV lines
Sensitivity	0.5 Lux, F1.4	
S/N ratio	>56 dB (AGC off, Gamma 1)	
Video output	Composite VBS signal 1.0 Vpp, 75 Ohm	
Gamma	0.45 - 1.0	
Gain	Manual - automatic. 0 to +15 dB	
Scanning	2:1 interlace - non-interlace	
Accumulation	Field - frame	
Synchronization	int. X-tal. Ext. HD/VD or random trig.	
HD sync. input/output	4V, 75 Ohm*	
VD sync. input/output	4V, 75 Ohm*	
Trigger input	4V, 75 Ohm*	
WEN out (Write Enable)	4V, 75 Ohm	
EEN out (Exposure Enable)	4V, 75 Ohm	
Pixel clock output (optional)	4V, 75 Ohm, sine	
Internal shutter	Off, 1/100, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10,000 sec.	
Trigger shutter	1/60, 1/125, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10,000 sec.	
Ext. continuous variable shutter	1/77 to 1/10,000 sec. (trigger mode 2)	
Long time exposure	1 field to (Ext. VD pulse interval)	
Operating temperature	-5°C to +45°C	
Humidity	20 - 80% non-condensing	
Power	12V DC $\pm 10\%$ . 3.6W (M536), 3.3W (M538/M539)	
Dimensions (control unit)	40 x 50 x 80 mm (HxWxD)	
Weight (control unit)	210 g	
Dimensions (camera head)	$\varnothing 17$ x 60 mm (536)	
Dimensions (camera head)	$\varnothing 17$ x 95 mm (538, 539)	
Weight (camera head)	10 g (536), 15 g (538, 539)	
Lens mount	M15.5 x 0.5	

\*) HD sync. VD sync./Trigger in or out by internal straps. Inputs TTL or 75 Ohm terminated by internal straps.

## Connection Description







- DC-IN/SYNC.**
- Pin 1 Ground
  - 2 +12V DC
  - 3 Ground
  - 4 Video output
  - 5 Ground
  - 6 HD in/HD out
  - 7 VD in/VD out
  - 8 Ground
  - 9 N.C. Y/Pixel clock out
  - 10 Ground
  - 11 +12V DC
  - 12 Ground




- TRIGGER**
- Pin 1 N.C.
  - 2 EEN output
  - 3 Ground
  - 4 N.C.
  - 5 Trig. input
  - 6 WEN pulse output

## Dimensions





## Switch Setting

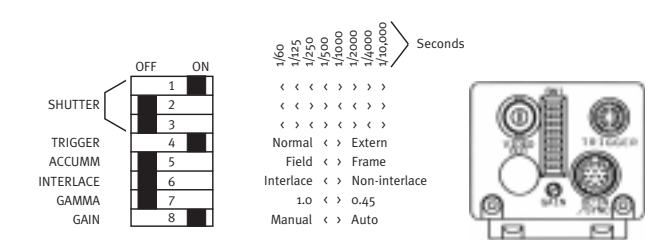

## Ordering Information

- CV-M536 1/2" Monochrome Remote Head Camera CCIR/EIA 2 m Cable
- CV-M538 1/2" Monochrome Remote Head Camera CCIR/EIA 5 m Cable
- CV-M539 1/2" Monochrome Remote Head Camera CCIR/EIA 10 m Cable
- OP-735 Special Lens 7.5 mm

## Camera Head Dimensions

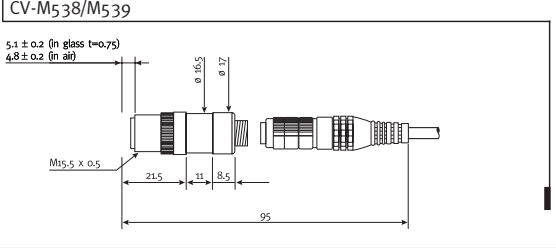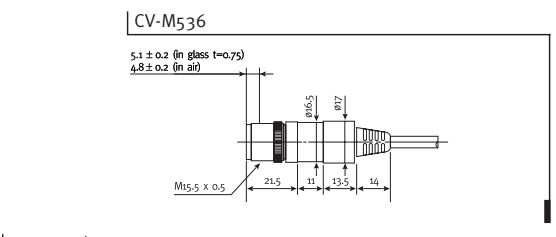

**JAI Corporation, Japan**  
 German Industry Center  
 1-18-2 Hakusan, Midori-ku  
 Yokohama,  
 Kanagawa 226-0006, Japan  
 Phone +81 45 933 5400  
 Fax +81 45 931 6142  
 www.jai-corp.co.jp

**JAI A-S, Denmark**  
 Camera Solutions  
 Produktionsvej 1, 2600 Glostrup  
 Copenhagen, Denmark  
 Phone +45 4491 8888  
 Fax +45 4491 8880  
 www.jai.dk

**JAI UK Ltd., England**  
 Audley House  
 Northbridge Road  
 Berkhamsted  
 Herts HP4 1EH, England  
 Phone +44 1442 879 669  
 Fax +44 1442 879 281

**Costar, USA**  
 43517 Ridge Park Drive  
 Temecula, CA 92590  
 United States of America  
 Phone +1 909 699 9000  
 Fax +1 909 308 9188  
 www.costar-usa.com



THE MECHADEMIC COMPANY

Visit our web site on [www.jai.dk](http://www.jai.dk)

Company and product names mentioned in this datasheet are trademarks or registered trademarks of their respective owners. JAI A.S. cannot be held responsible for any technical or typographical errors and reserves the right to make changes to products and documentation without prior notification.

31007271.01.99.4000.4280