

CDI®-200/75-LED Red

PART NUMBER: 010-252000

PRODUCT DESCRIPTION: The CDI-200/75-LED (Cloudy Day Illuminator®), is ideal for illuminating uneven specular surfaces. The CDI provides outstanding uniformity, up to $\pm 10\%$ maximum deviation within the field of view.

ILLUMINATION:

Lighting Technique: Continuous Diffuse

Source Type: Red LED
Spectrum: 636 nm
Expected Life: 60,000 hours
Light Delivery: Diffused
Light Aperture: 200 mm (8 in.)
Suggested Field Of View: 75 mm (3 in.)
Suggested Stand-Off: 25.4 mm (1in.)

ELECTRICAL:

Input Voltage: 12VDC Input Current: 2.2A

Cable Length: 1.8 M (6 ft.) ¹ **Connector:** 9 pin D-sub male ¹

CE Conformity: Yes

ACCESSORIES:

Part Number Description

030-003700 Extension Cable, Continuous, 1.8 M (6 ft.) 030-003701 Extension Cable, Continuous, 3.0 M (10 ft.)

010-501200 VPS, Variable, US Cord 010-501201 VPS-EU, Variable, EU Cord

MECHANICAL:

Diameter x H: 200.0 mm x 153.2 mm

(8.0 in x 6.03 in.)

Mounting: $(4x) \frac{1}{4}-20$

Housing Material: Black Anodized Aluminum **Weight:** 1597 grams (3.5 lbs.)

ENVIRONMENTAL:

Max. Operating Humidity: 95% non-condensing


Operating Temp.: $40^{\circ}\text{C} (104^{\circ}\text{F})$ Storage Temp.: $50^{\circ}\text{C} (122^{\circ}\text{F})$



CABLE PINOUT: 1

Pin#	1	2	3	4	5	6	7	8	9
Model									
12V Continuous Models	+12VDC (Fan)	GND (Fan)	GND (Ring/ DOAL)	+12VDC (Ring)	+12VDC (DOAL)	n/a	n/a	n/a	n/a

¹ Cable/connector specs reference included extension cable.

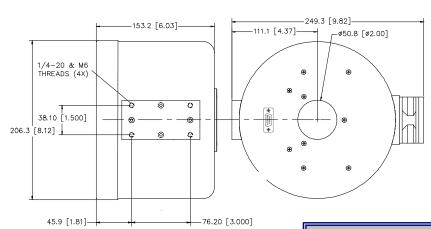



<u>All</u> RVSI/NER Products come with an Industry-Leading 2-Year Warranty

Products are protected under US Patent #s; 5,461,417; 5,187,611; 5,539,485; 5,301,402; 5,604,550; 5,684,530; 5,713,661

02; 5,604,550; 5,684,530; 5,713,661 **NER Document:** CU-010-252000 - **Revised:** 05/07/02